

# DYNAPRO



## UNDERMOUNT SLIDE SYSTEM



**DYNAPRO**  
FULL CATALOG



### SYNCHRONIZED PERFORMANCE

Synchronized, soft-close, and full extension, DYNAPRO slides move with a slight pull and gentle push, providing an efficient, effective, and concealed solution. Made in Austria, Dynapro is known for its smooth running performance and quiet kinematics, with its integrated rack and pinion system. This technology allows the slides to move in progression, improving glide, reducing noise, and preventing the drawer from binding when closing.

Product: Undermount Drawer Slides  
Mounting: Side Mount  
Connect/Disconnect: Self-latching Front Locking Devices  
Material: Galvanized Cold-rolled Steel  
Hole Pattern: 32mm  
Face Frame Mounting: Yes


Drawer Material: 12.7mm (1/2") to 16mm (5/8") and  
16mm (5/8") to 19mm (3/4")

Travel: Synchronized Full Extension


Length: 229mm (9"), 305mm (12"), 381mm (15"), 457mm (18"),  
533mm (21"), 610mm (24"), 686mm (27"), 762mm (30")

Action: Soft-close  
Slide Configuration: Handed  
Finish: Corrosion Resistant Zinc Coated Steel

Packaging: All Sizes 5 Sets per Corrugated Carton for (229mm (9") –  
610mm (24")) or 4 Sets per Corrugated Carton for the  
686mm (27") and 762mm (30") Extended Lengths

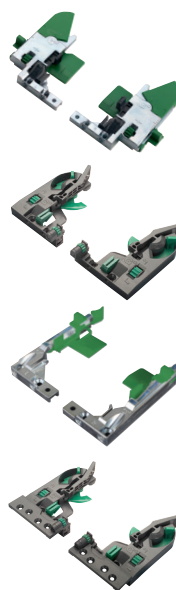

**Wide Selection of  
Front Locking Devices**

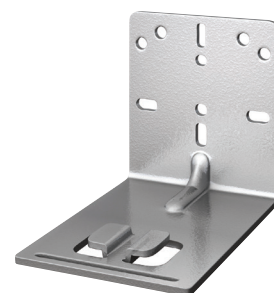

**Rear Mounting  
Bracket**

DYNAPRO, designed and manufactured in Austria for wooden drawers, combines intelligent features and superb gliding action for today's modern cabinetry. Dynapro is offered in both 2D and 3D versions, with the 3D version supporting tilt adjustment via an additional rear adapter. No matter which version is chosen, both slides provide the same synchronization and precision synonymous with Dynapro.





- 3-dimensional (height, side, and depth) adjustment. Tilt adjustment with use of rear adapter
- For 5/8" (16mm) and 3/4" (19mm) drawer material
- Uniform height position of drawer front panel, regardless of weight
- Superior stability provided by 31mm wide drawer members
- Cleats on the front locking device allow maximum connection between drawer slide and front locking device
- 100 lb – 132 lb load capacity
- Suitable for drawers up to 48" wide
- Synchronization for smooth, silent operation



**DYNAPRO**  
VIRTUAL TOUR


**DYNAPRO meets and exceeds ANSI/BHMA A156.9 Grade 1 testing requirements.**

## DYNAPRO DRAWER INSTALLATION DIMENSIONS

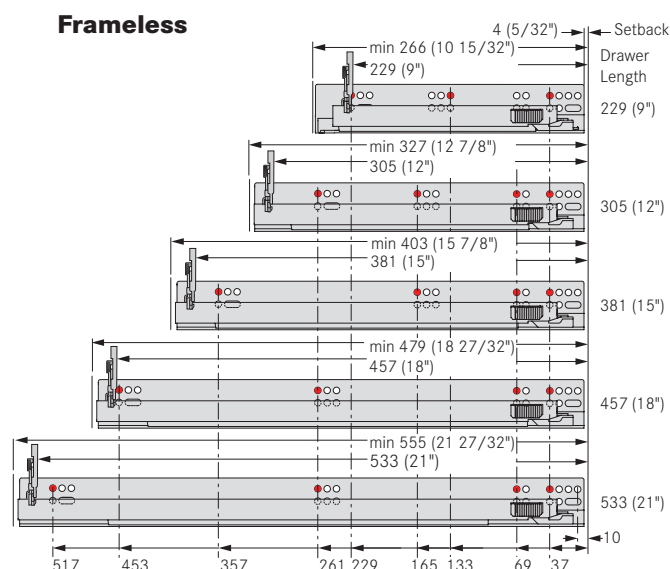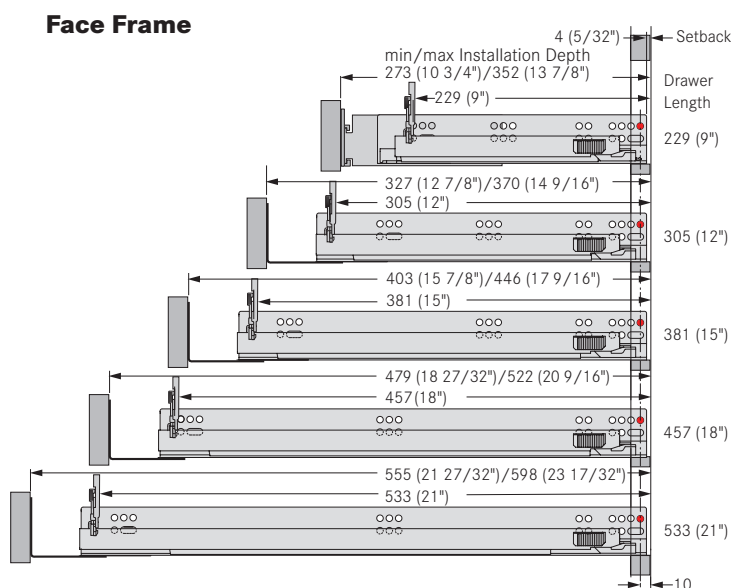

Dynapro Tipmatic Soft-close, touch to open system, provides smooth opening Grass Soft-close. A gentle tap on the front panel opens the drawer automatically and a slight push closes it effortlessly, thanks to the integrated Soft-close with liquid damper. One Tipmatic unit fits nominal lengths from 305mm (12") to 762mm (30"). A 3-step opening force ensures smooth movement regardless of weight and size of drawer fronts.

Sensomatic is an electronic opening system designed to work with Dynapro. You can operate up to 30 opening units from one power supply and open drawers as large as 48" wide.

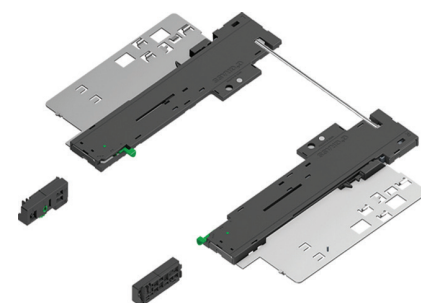

**Tipmatic Soft-Close System**